DIRECT MOUNT SERIES

BEST WEIGHT TO PAYLOAD RATIO

The K-Tec™ 1236 has the best load to scraper weight ratio and the lowest cost per yard of any unit in the fleet. The 1236 has an extendable rack and sidewalls to contain stackable materials such as clay. Our groundbreaking innovations have made our scrapers the most productive and profitable option around.

www.**ktec**.com Phone: 1-204-746-6435 Toll Free: 1-866-496-7561

1236 SPECIFICATIONS

General Specifications	Standard	Metric
Heaped Capacity (ISO)	36 Cubic Yards	27.52 Cubic Metres
Struck Capacity	24 Cubic Yards	18.35 Cubic Metres
Max Loading Rating	86,400 lbs	39,191 kgs
Bucket Dimensions	12' W x 5' H x 12' L	3.66m W x 1.52m H x 3.66m L
Cutting Width	12'	3.66m
Cutting Edge	3-Piece Blade	3-Piece Blade
Gate Opening	84"	2.13m
Rack Height (Tiltable)	4'	1.22m
Gate Cylinders	4.5" x 28"	114mm x 711mm
Lift Cylinders	5.5" x 38"	140mm x 965mm
Ejector Cylinder	5.5" x 76"	140mm x 1,930mm
Transport Cutting Edge Clearance	30"	0.76m
Hitch Pin to Rear Axle Length	30'11"	9.42m
Wrap Around Mud Scrapers	Standard	Standard
Radial Tires (4)	23.5 R25	23.5 R25

K-Tec Scraper Features

Optional Upgrades	
Brake System	4 caliper disc brakes

Recommended Power Units

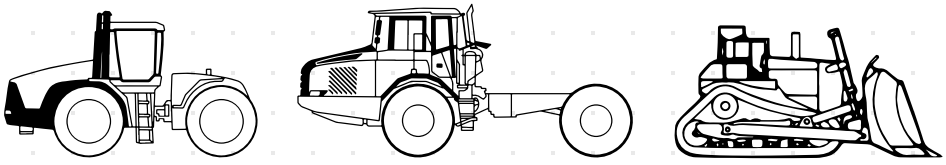

Agricultural Tractors
350HP +/260 KW +

Construction Tractors
400HP +/298 KW +

Dozers
310HP +/231 KW +

Transportation Measures	Standard	Metric
Overall Width	13' 10"	4.22m
Overall Height	10'	3.05m
Overall Length	36' 9"	11.20m
Shipping Weight	30,287 lbs	13,738 kgs

Specifications are subject to change without notice.

Gallery

Hard Pan / Southern USA

Topsoil / Northern USA

Coal / Midwest USA

Sand + Topsoil / Australia

Sand / Northern USA

Topsoil + Clay / Western Canada

Topsoil / Australia