



DIRECT MOUNT SERIES

1233



MOST POPULAR

The K-Tec 1233 is the most popular model in the fleet. This multipurpose machine is a powerful worker in any soil condition with unmatched fuel efficiency and an amazing loading speed.



1233 SPECIFICATIONS

General Specifications	Standard	Metric
Heaped Capacity (ISO)	33 Cubic Yards	25.23 Cubic Metres
Struck Capacity	19 Cubic Yards	14.53 Cubic Metres
Max Loading Rating	80,000 lbs	36,287 kgs
Bucket Dimensions	12' W x 4' 3" H x 12' 10" L	3.66m W x 1.29m H x 3.91m L
Cutting Width	14'	4.27m
Cutting Edge	3-Piece Blade	3-Piece Blade
Gate Opening	80"	2.03m
Rack Height (Tilttable)	4'	1.22m
Gate Cylinders	5" x 28"	0.127 m x 0.711m
Lift Cylinders	5.5" x 31"	0.140m x 0.787m
Ejector Cylinder	5.5" x 76"	0.140m x 1.93m
Transport Cutting Edge Clearance	28"	0.71m
Hitch Pin to Rear Axle Lenth	31'5"	9.58m
Wrap Around Mud Scrapers	Standard	Standard
Radial Tires (4)	23.5 R25	23.5 R25


K-Tec Scraper Features



Optional Upgrades

Radial Tires (4)	26.5 R25
Brake System	4 caliper disc brakes
Gate Extension	Adds 3 cubic yards to heaped capacity

Recommended Power Units

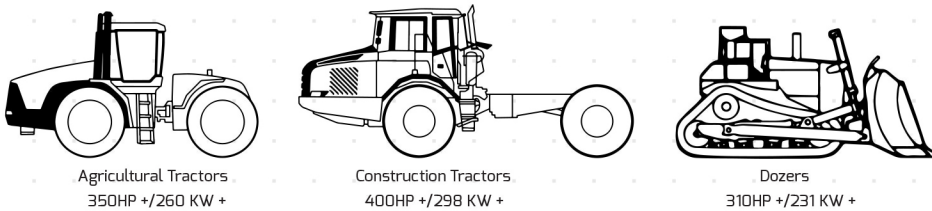

Transportation Measures	Standard	Metric
Overall Width	14'	4.26m
Overall Height	10'	3.05m
Overall Length	38' 5"	11.71m
Shipping Weight	35,892 lbs	16,280 kgs

Specifications are subject to change without notice.

Gallery

Sand / Saudi Arabia



Clay / Regina, SK



Coal / Peabody, IL



Topsoil / Fort Ransom, ND



Sand + Clay / Evansville, IN



Gypsum Rock / Norman, OK



Topsoil / Hayden, CO

